

GEBRUIKERSHANDLEIDING

MANUAL

# TOP KEEPER PRO



**NL**

MET BETREKKING TOT DE ALGEMENE VEILIGHEID RAADPLEEG DE HANDLEIDING VOOR HET GEBRUIK VAN DE MACHINE.

GEBRUIK DE MACHINE NIET IN WATER, WORTELGEWAS OF ROTSACHTIG GEBIED. ALS DE ROTERENDE KOPPEN VASTLOPEN STOP DE MOTER EN VERWIJDER DE OORZAAK.

**EN**

AS TO GENERAL SAFETY OPERATION AND POWER HEAD OPERATION SUCH ENGINE START/SHUT OFF PLEASE REFER TO THE OWNERS MANUAL PROVIDED WITH YOUR TOP KEEPER PRO. DO NOT WORK IN WATER OR ROOT OR ROCKY AREA. IF ROTATING ELEMENTS STOP, FIRST SHUT OFF ENGINE THEN REMOVE THE CAUSE.

The logo for Prontec, featuring the word "Prontec" in a bold, green, sans-serif font. The letter 'o' is stylized with a blue and green swirl. The text is set against a large, curved, blue-to-green gradient background that resembles a stylized 'P' or a protective shield.

**Prontec**



**1.** Het TOP KEEPER PRO pakket is samengesteld uit de delen weergegeven op de foto, inclusief de moersleutel.

The TOP KEEPER PRO kit is composed by parts in the picture, including the wrench key.



**5.** Draai de bevestigingsmoer op het draadeinde.

Twist the fixing nut on the threaded rod.




**2 + 3** Demonteer de originele beschermkap van de bosmaaier.

Remove the original guard of the brush cutter.



**6.** Draai de moer stevig vast met een sleutel welke is meegeleverd met uw bosmaaier.

Tighten the nut firmly with a wrench that came with your brush cutter.

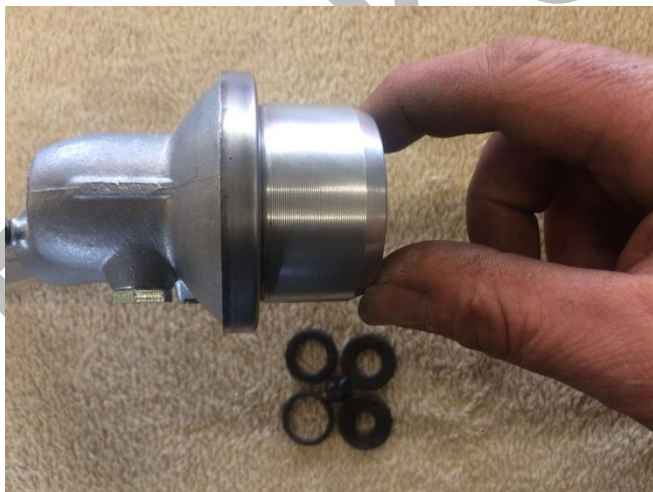

**4.** Bevestig de aluminium bus met de daarbij behorende centreerring die is meegeleverd.

Attach the aluminum can with the associated centering which is included.



**7.** Draai de aluminium bus op de TOP KEEPER PRO.

Tighten the aluminum can on the TOP KEEPER PRO.



**8.** Draai de aluminium bus vast met de bijgeleverde sleutel en pin.

Tighten the aluminum can with the provided key and pin.




**9.** Bevestig de twee beugels aan de TOP KEEPER PRO met de bijgeleverde inbusboutjes.

Fix the two brackets tot the TOP KEEPER PRO using the supplied screws



**10.** Monteer de geleverde beschermkap met de juiste rubberen huls, welke meegeleverd is, die passend is op de bus.  
Install the supplied protective cover with the right rubber sleeve, which is included, that fit on the tube.

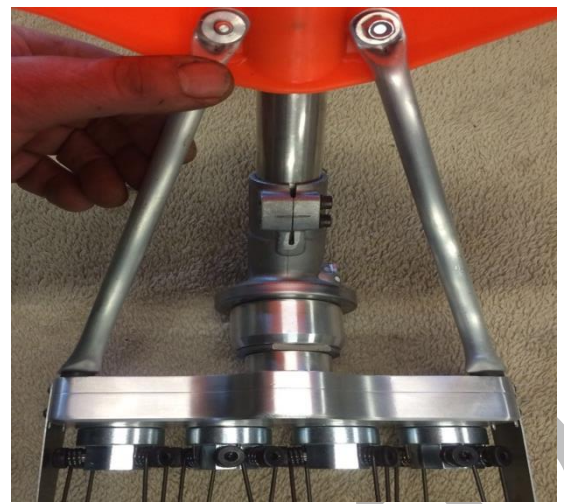

**11.** Bevestig de twee beugels aan de onderkant van de beschermkap.

Fix the two brackets on the bottom of the cover.



**12.** Draai de schroeven vast met een m10 sleutel.

Tighten the screws with a m10 wrench.



**13.** TOP KEEPER PRO klaar voor gebruik!

TOP KEEPER PRO ready to use!